

SCD4455

ACT4455-4459 Single Supply Transceiver For MIL-STD-1553/1760 & SAE-AS15531

ACT4455-4459

FEATURES

- ❑ Small size, light weight and low standby power single transceiver.
- ❑ Single +5V power supply.
- ❑ Monolithic construction.
- ❑ Outstanding MIL-STD-1553/SAE-AS15531 performance.
- ❑ Designed for commercial, industrial and aerospace applications.
- ❑ Processed and screened to MIL-STD-883 specs.
- ❑ MIL-PRF-38534 compliant devices.
- ❑ CAES is a Class H & K MIL-PRF-38534 manufacturer.
- ❑ Packaging – 28-pad Ceramic LCC, Hermetic.
- ❑ DSCC SMD: 5962-96741 approved.

GENERAL DESCRIPTION

The CAES ACT4455/4459 series are next generation monolithic transceiver designs which provide full compliance with MIL-STD-1553A/B, MIL-STD-1760 and SAE-AS15531 requirements in the smallest packages with low power consumption and single power supply operation. The series performs the front-end analog function of inputting and outputting data through a transformer to the MIL-STD-1553 data bus.

The CAES ACT4455/4459 series are next generation monolithic transceiver designs which provide full compliance with MIL-STD-1553A/B, MIL-STD-1760 and SAE-AS15531 requirements in the smallest packages with low power consumption and single power supply operation. The series performs the front-end analog function of inputting and outputting data through a transformer to the MIL-STD-1553 data bus.

TRANSMITTER

The Transmitter section accepts bi-phase TTL data at the input and when coupled to the data bus with a 1:2.5 ratio transformer the data bus signal is typically 7.5 volts P-P at A-A' (See Figure 5). When both DATA and DATA inputs are held low or high, the transmitter output becomes a high impedance and is "removed" from the line. In addition, an overriding "INHIBIT" input provides for the removal of the transmitter output from the line. A logic "1" applied to the "INHIBIT" takes priority over the condition of the data inputs and disables the transmitter (See Transmitter Logic Waveform, Figure 1). The Transmitter may be safely operated for an indefinite period with the bus (point A-A') short circuited at 100% duty cycle.


RECEIVER

The Receiver section accepts bi-phase differential data at the input and produces two TTL signals at the output. The outputs are DATA and DATA, and represent positive and negative excursions of the input beyond a pre-determined threshold (See Receiver Logic Waveform, Figure 2).


The pre-set internal thresholds will detect data bus signals exceeding 1.20 Volts P-P and reject signals less than 0.6 volts P-P when used with a transformer (See Figure 5 for transformer data and typical connection). A low level at the Strobe input inhibits the DATA and DATA outputs.

ACT4455-4459

DETAILED BLOCK DIAGRAM

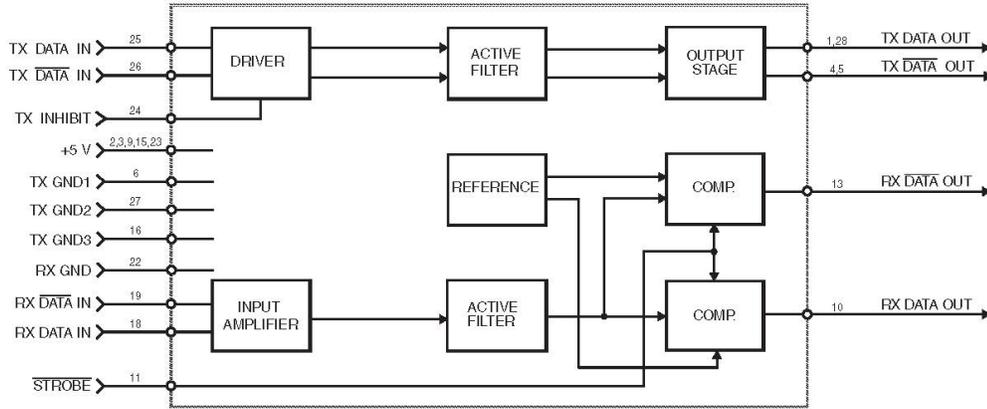


BLOCK DIAGRAM (WITHOUT TRANSFORMER)

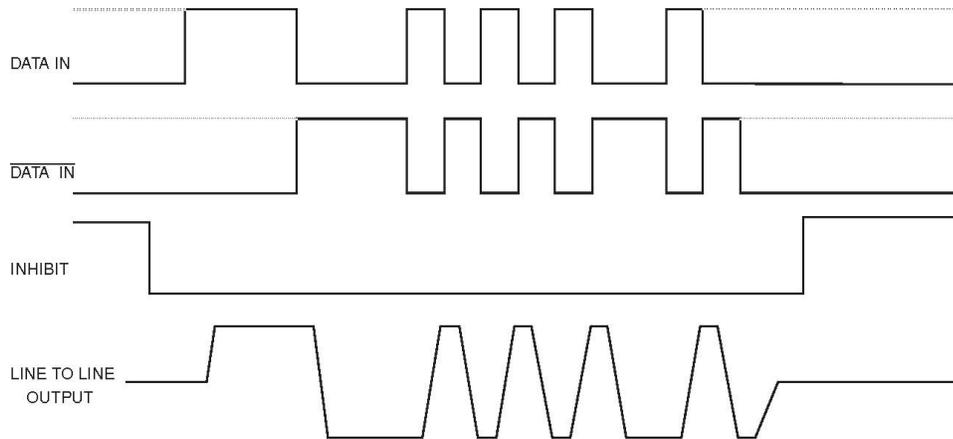

NOTE: DATA and DATA inputs must be complimentary waveforms or 50% duty cycle average, with no delays between them, and must be in the same state during off times (both high or low).

FIGURE 1: TRANSMITTER LOGIC WAVEFORMS IDEALIZED *

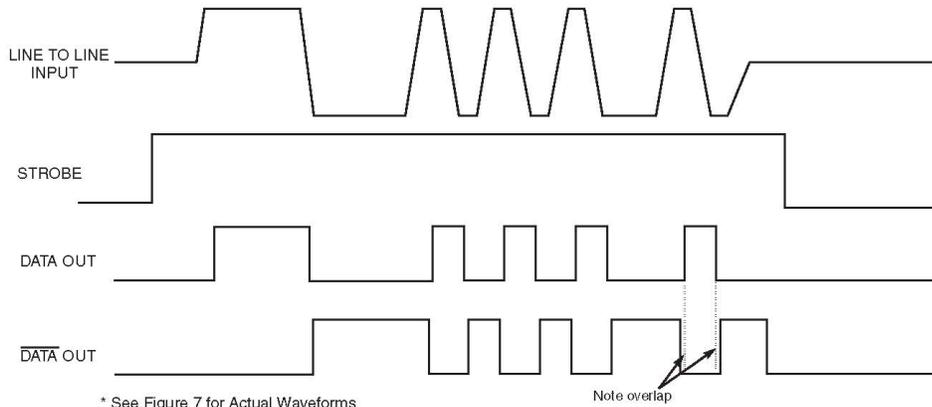

* See Figure 7 for Actual Waveforms

FIGURE 2: RECIEVER LOGIC WAVEFORMS IDEALIZED *

ACT4455-4459

ABSOLUTE MAXIMUM RATINGS

Table 1: Absolute Maximum Ratings

PARAMETER	RATING
Operating case temperature	-55°C to +125°C
Storage case temperature	-65°C to +150°C
Power supply voltage	-0.3VDC to +7.0VDC
Logic input voltage	-0.3VDC to +5.5VDC
Receiver differential input	±10 V
Receiver input voltage (common mode)	±5 V
Driver peak output current	1.0 A
Total package power dissipation over the full operating case temperature range	2.0 Watts
Maximum junction to case temperature	10°C
Thermal resistance – Junction to case	5°C/W

Electrical Characteristics – Driver Section

Table 2: Input Characteristics, TX DATA IN or TX DATA IN (Notes 2 & 3 Apply)

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
"0" Input Current	$V_{IN} = 0.4V$	I_{ILD}	-	-0.2	-0.4	mA
"1" Input Current	$V_{IN} = 2.7V$	I_{IHD}	-	1	40	μA
"0" Input Voltage	-	V_{ILD}	-	-	0.7	V
"1" Input Voltage	-	V_{IHD}	2.0	-	-	V

Table 3: Inhibit Characteristics

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
"0" Input Current	$V_{IN} = 0.4V$	I_{ILI}	-	-0.2	-0.4	mA
"1" Input Current	$V_{IN} = 2.7V$	I_{IHI}	-	1.0	40	μA
"0" Input Voltage	-	V_{ILI}	-	-	0.7	V
"1" Input Voltage	-	V_{IHI}	2	-	-	V
Delay from TX inhibit, (0 to 1) to inhibited output	-	t_{DXOFF}	-	250	450	nS
Delay from TX inhibit, (1 to 0) to active output	-	t_{DXON}	-	150	250	nS
Differential Output Noise, inhibit mode	-	V_{NOI}	-	2	10	mVp-p
Differential Output Impedance (inhibited)	Note 1	Z_{OI}	2K	-	-	Ω

Table 4: Output Characteristics

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Differential output level	$R_L = 35\ \Omega$	V_O	6.5	7.5	9	Vp-p
Rise and fall times (10% to 90% of p-p output)	-	t_r	100	200	300	nS
Output offset at point A-A' on Figure 5, 2.5 μS after midpoint crossing of the parity bit of the last word of a 660μS message	$R_L = 35\ \Omega$	V_{OS}	-	-	±90	mVpeak
Delay from 50% point of TX DATA or TX DATA input to zero crossing of differential signal	-	t_{DTX}	-	120	250	nS

ACT4455-4459

ELECTRICAL CHARACTERISTICS – RECEIVER SECTION

Table 5: Electrical Characteristics

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Differential Voltage Range (See Figure 5, point P-P')	TXFMR 2.5:1	V_{IDR}	-	14	20	Vp-p
Common Mode Rejection Ratio (Note 3)	-	CMRR	45	-	-	dB

Table 6: Strobe Characteristics (Logic "0" Inhibits Output)

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
"0" Input Current	$V_S = 0.4V$	I_{IL}	-	-0.2	-0.4	mA
"1" Input Current	$V_S = 2.7V$	I_{IH}	-	1	+40	μA
"0" Input Voltage	-	V_{IL}	-	-	0.7	V
"1" Input Voltage	-	V_{IH}	2.0	-	-	V
Strobe Delay (Turn-on or Turn-off)	-	t_{SD}	-	50	200	nS

Table 7: Threshold Characteristics (Sinewave Input)

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Internal Threshold Voltage (Referred to the bus)	100KHz-1MHz	V_{TH}	0.56	0.82	1.10	Vp-p

Table 8: Output Characteristics, RX DATA and RX DATA

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
"1" State	$I_{OH} = -0.4mA$	V_{OH}	2.5	3.7	-	V
"0" State	$I_{OL} = -4mA$	V_{OL}	-	0.35	0.5	V
Delay, (Average) from differential input zero crossings to RX DATA and RX DATA output	50% points	t_{DRX}	-	340	500	nS

POWER DATA

Table 9: Power Supply Currents – Per Channel

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Transmitter Standby	(Note 4)	I_{CC}	-	18	30	mA
25% Duty Cycle			-	150	220	
50% Duty Cycle			-	300	395	
100% Duty Cycle			-	600	745	

Table 10: Power Supply Voltage

PARAMETER	CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Operating Power Supply Voltage Range	-	V_{CC}	+4.75	+5.00	+5.50	V


NOTES:

- Power on or off, measured from 75KHz to 1MHz at point A-A' and transformer self impedance of 3K Ω minimum.
- $V_{CC} = 5$ Volts $\pm 0.1V$, bypassed by 2.2 μF (Tantalum recommended) Capacitor minimum. All measurements & specifications apply over the temperature range of -55°C to +125°C (case temperature) unless otherwise specified.
- When measured at point A-A' with ± 10 Volt peak, line to ground, DC to 2MHz.
- Typical power is measured with V_{bus} at point A-A' = 7.5 Vp-p.

SCD4455


ACT4455-4459 Single Supply Transceiver For MIL-STD-1553/1760 & SAE-AS15531

ACT4455-4459

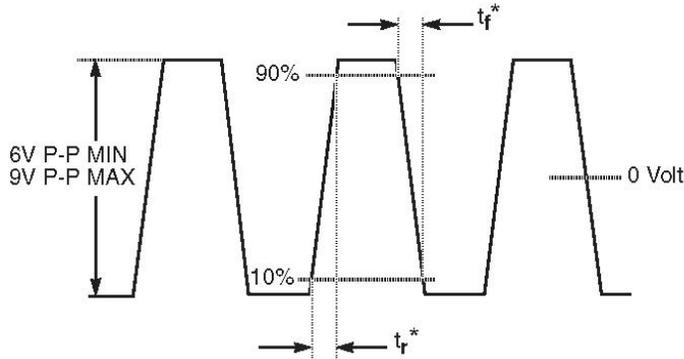

* Rise and fall times measured at point A-A' in Figure 5

FIGURE 3: TRANSMITTER (TX) OUTPUT WAVEFORM

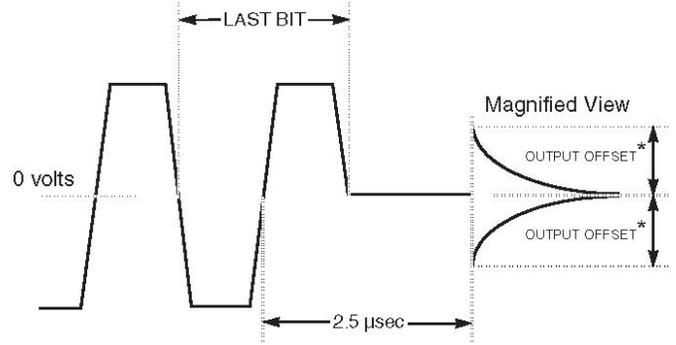

*Offset measured at point A-A' in Figure 5

FIGURE 4: TRANSMITTER (TX) OUTPUT OFFSET


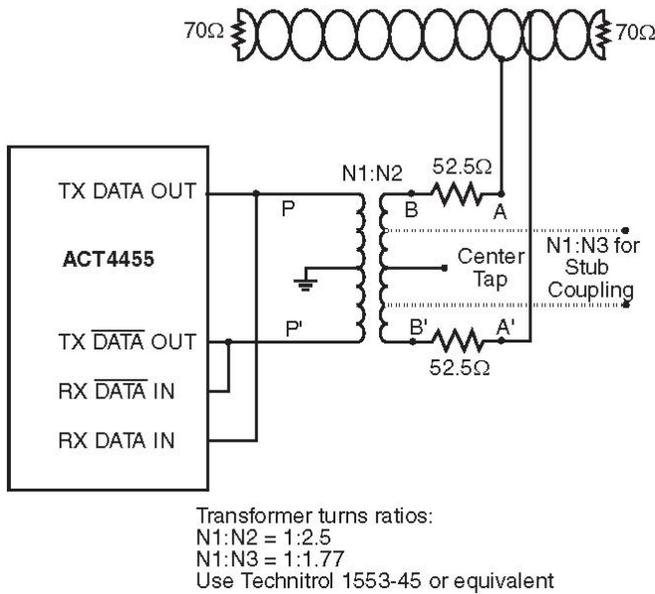




FIGURE 5: TYPICAL TRANSFORMER DIRECT CONNECTION

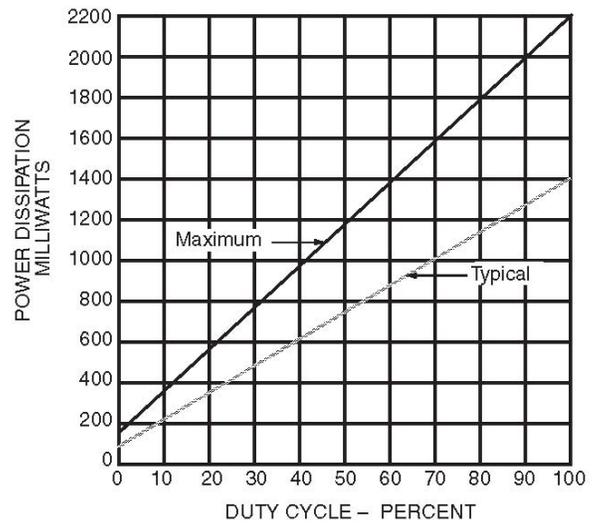

Note: $V_{CC} = 5VDC$, Transformer ratio 1:2.5, V_{BUS} (pt A-A') at 7.5Vp-p

FIGURE 6: POWER DISSIPATION VS. DUTY CYCLE

ACT4455-4459

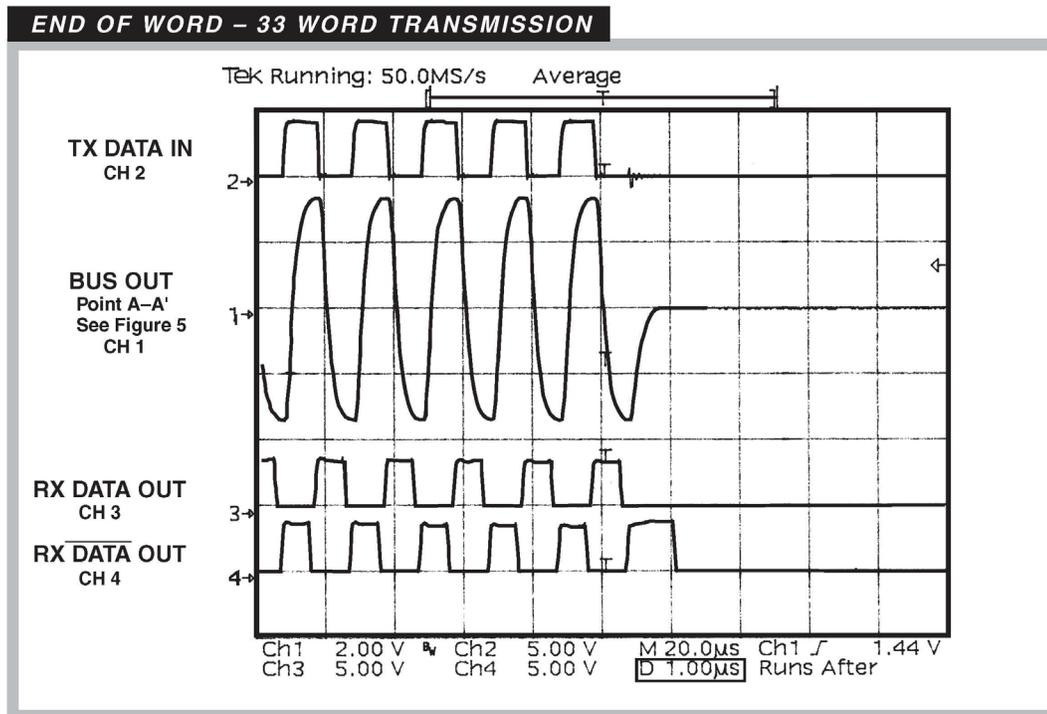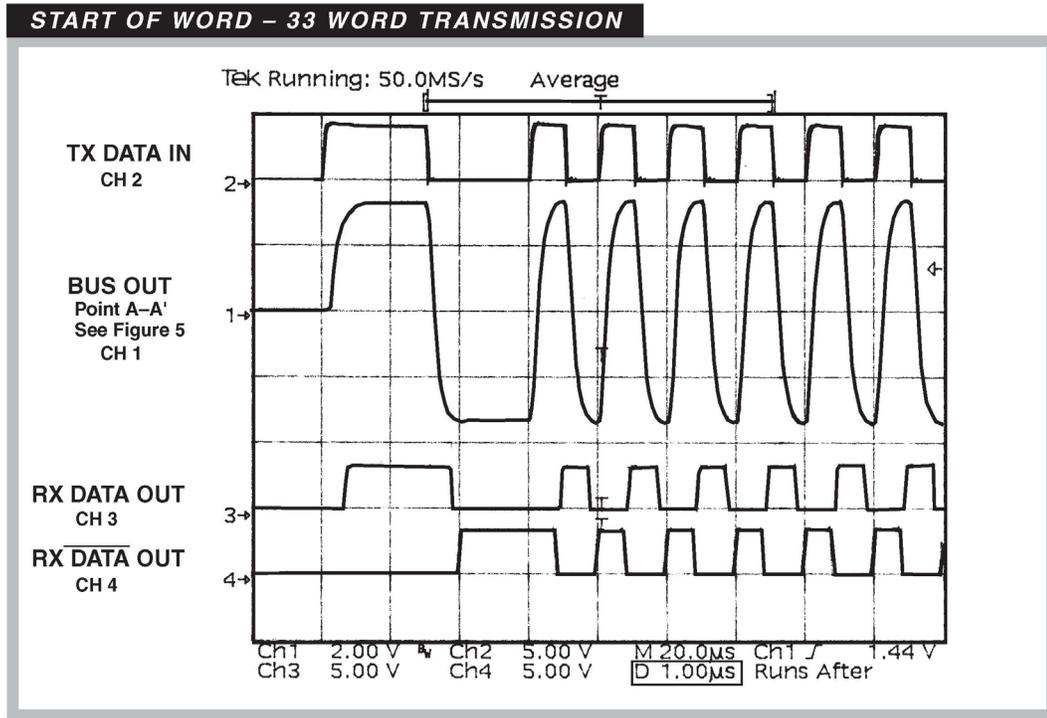

* Oscilloscope used is a TEK TDS540 with Probe 6139A.


FIGURE 7: ACTUAL HYBRID WAVEFORMS * - 25°C TYPICAL

SCD4455

ACT4455-4459 Single Supply Transceiver For MIL-STD-1553/1760 & SAE-AS15531

ACT4455-4459

LSS LEADLESS CHIP CARRIER PACKAGE CONFIGURATION

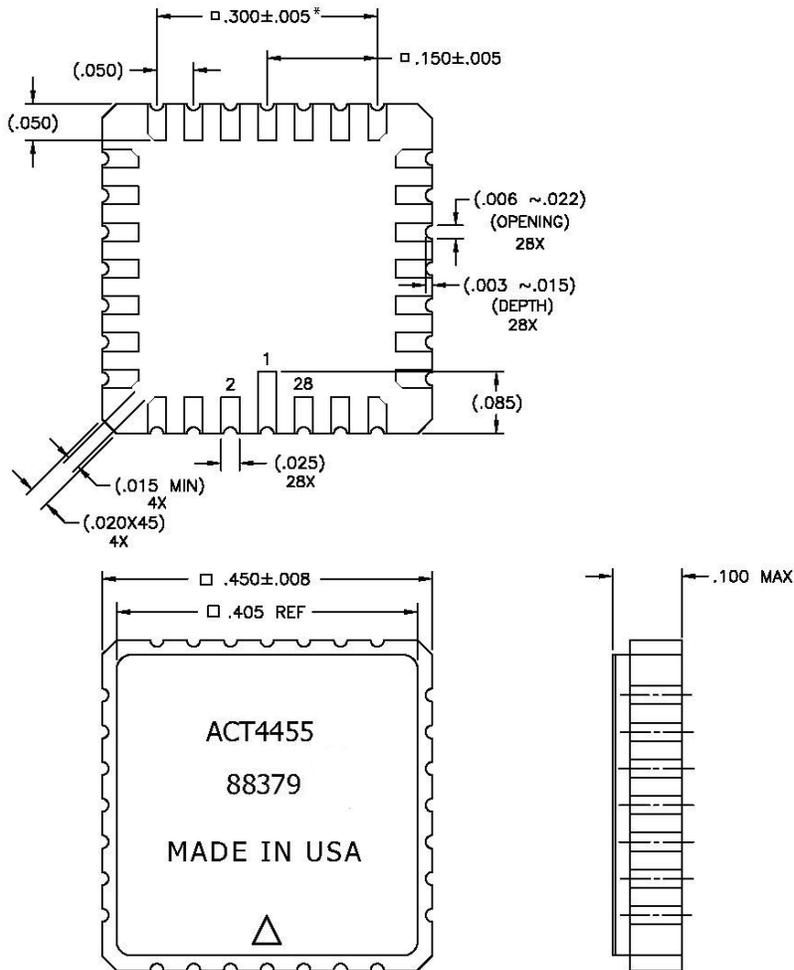

* NOTE: Castellation spacing .050 x 6, Tol. Non-Accumulative

Table 11: Pin Numbers and Functions

PIN #	FUNCTION	PIN #	FUNCTION
1	TX DATA OUT	15	+5V
2	+5V	16	TX GND3 **
3	+5V	17	NC
4	$\overline{\text{TX DATA OUT}}$	18	$\overline{\text{RX DATA IN}}$
5	$\overline{\text{TX DATA OUT}}$	19	$\overline{\text{RX DATA IN}}$
6	TX GND1 **	20	NC
7	NC	21	NC
8	NC	22	RX GND **
9	+5V	23	+5V
10	RX DATA OUT	24	TX INHIBIT
11	STROBE	25	TX DATA IN
12	NC	26	$\overline{\text{TX DATA IN}}$
13	$\overline{\text{RX DATA OUT}}$	27	TX GND2 **
14	NC	28	TX DATA OUT

** NOTE: Grounds not Internally connected

SCD4455

ACT4455-4459 Single Supply Transceiver For MIL-STD-1553/1760 & SAE-AS15531

ACT4455-4459

ORDERING INFORMATION

MODEL #	DSCC SMD #	SCREENING	RECEIVER DATA LEVEL
ACT4455	-	Military Temperature, -55°C to +125°C Screened in accordance with MIL-PRF-38534, Class H	Normally Low
ACT4455-001-1	5962-9674101H3C	In accordance with DSCC SMD 5962-96741	Normally Low
ACT4455-001-2	5962-9674101H3A		
ACT4459-001-1	5962-9674102H3C	In accordance with DSCC SMD 5962-96741	Normally High
ACT4459-001-2	5962-9674102H3A		

REVISION HISTORY

Date	Rev. #	Change Description	Initials
09/17/2018	D	REVISED PER ECN 7965-60	CL
02/18/2021	E	REVISED PER ECN 23515	CL

SCD4455

ACT4455-4459 Single Supply Transceiver For MIL-STD-1553/1760 & SAE-AS15531

ACT4455-4459

DATASHEET

REV E: 02/18/2021

CAES — DATASHEET DEFINITIONS

	DEFINITION
Advanced Datasheet	Product In Development
Preliminary Datasheet	Shipping Prototype
Datasheet	Shipping QML & Reduced Hi - Rel

Cobham Long Island Inc. d/b/a CAES reserves the right to make changes to any products and services described herein at any time without notice. Consult an authorized sales representative to verify that the information in this data sheet is current before using this product. The company does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing; nor does the purchase, lease, or use of a product or service convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of the company or of third parties.